


AnchorMark

Premium Concrete Screw Countersunk & HEX Head

High end, powerful screw solution for fast and simple installation.



LEARN MORE

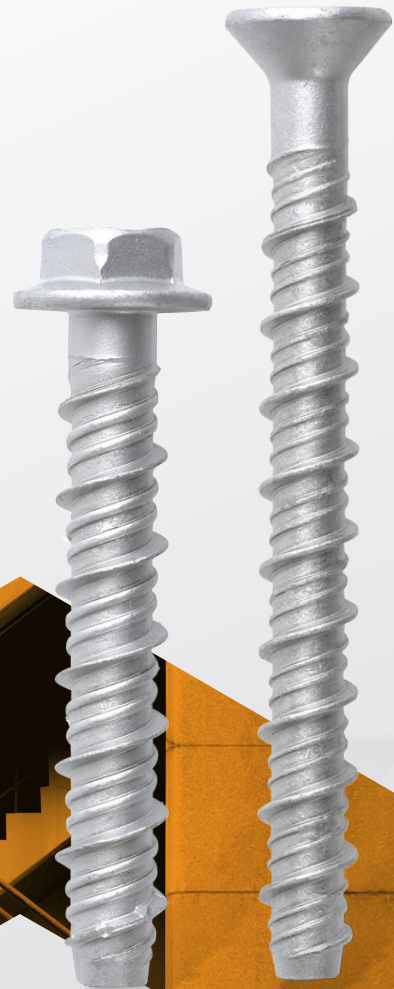

TECHNICAL DATA



HEX Head



CSK Head

AnchorMark Premium Concrete Screws



| Type | Art. No. | Head-type | ETA full range approved | Drill [mm] | Ø Drill hole in object [mm] | Ø Screw [mm] | Thread length [mm] | Min. drill depth at push through hole [mm] | Min. screw in depth [mm] | Max. useable length [mm] | Installation torque [Nm] | Acti-vation | Oty. per inner box [pce] |
|-------------|-----------|-----------|-------------------------|------------|-----------------------------|--------------|--------------------|--|--------------------------|--------------------------|--------------------------|-------------|--------------------------|
| 6 x 45 mm | 519006045 | HEX | ■ | 6 | 9 | 7,5 | 45 | 55 | 33 | 12 | 20 | SW10 | 100 |
| 6 x 60 mm | 519006060 | | | | | | 5 | | | | | | |
| 6 x 80 mm | 519006080 | | | | | | 25 | | | | | | |
| 6 x 100 mm | 519006100 | | | | | | 45 | | | | | | |
| 8 x 55 mm | 519008055 | | | | | | 55 | 55 | 50 | 5 | | | |
| 8 x 75 mm | 519008075 | | | | | | 15 | | | | | | |
| 8 x 90 mm | 519008090 | | | 30 | | | | | | | | | |
| 8 x 110 mm | 519008110 | | | 50 | | | | | | | | | |
| 10 x 75 mm | 519010075 | | | 5 | | | | | | | | | |
| 10 x 85 mm | 519010085 | | | 15 | | | | | | | | | |
| 10 x 100 mm | 519010100 | | | 30 | | | | | | | | | |
| 10 x 120 mm | 519010120 | | | 50 | | | | | | | | | |
| 10 x 140 mm | 519010140 | | | 70 | | | | | | | | | |
| 12 x 90 mm | 519012090 | | | 10 | | | | | | | | | |
| 12 x 110 mm | 519012110 | 30 | | | | | | | | | | | |
| 12 x 130 mm | 519012130 | 50 | | | | | | | | | | | |
| 12 x 150 mm | 519012150 | 70 | | | | | | | | | | | |
| 14 x 80 mm | 519014080 | 80 | 95 | 75 | 5 | 120 | SW18 | 25 | | | | | |
| 14 x 115 mm | 519014115 | 5 | | | | | | | | | | | |
| 14 x 135 mm | 519014135 | 25 | | | | | | | | | | | |
| 14 x 160 mm | 519014160 | 50 | | | | | | | | | | | |
| 6 x 52 mm | 520006052 | CSK | ■ | 6 | 9 | 7,5 | 42 | 62 | 40 | 12 | 20 | TX 30 | 100 |
| 6 x 72 mm | 520006072 | | | | | | 17 | | | | | | |
| 6 x 102 mm | 520006102 | | | | | | 55 | 47 | | | | | |
| 6 x 152 mm | 520006152 | | | | | | 142 | 162 | 97 | | | | |

* recommended loads are for single anchors in C20/25 uncracked concrete load tested far away from other anchors and from edges.



FUNCTIONING

- The AM premium concrete screw is suitable for push-through installation.
- When the concrete screw is screwed into the drill hole, the thread flanks cut positively into the concrete.
- Use FBS A4 for external applications and those in a damp environment.
- Use a torque wrench for easy installation.
- Do not exceed the maximum installation torque.

ADVANTAGES

- Simple and time-saving threaded screws for the use in concrete.
- Once screwed into the hole the thread taps into concrete for positive fit anchorage.
- Completely removable anchor suitable for temporary fixings.
- Virtually expansion-free operation allows cost-efficient fixing with small axial spaces and edge distances
- RUSPERT® coating provides excellent corrosion protection.
- The ETA covers applications in cracked and non-cracked concrete and seismic performance categories C1*.



DOWNLOAD ETA PDF



AnchorMark

*Refer to ETA 15/0905 on our website for more information



info@anchormark.com.au



+61 3 9799 2096



anchormark.com.au